

HINGES

No. 5869-X

Material 10 ga. (.134") high-strength, low alloy.





No. 5869-X

 $8\mbox{"}$ stamped steel hinge for flush mounting. Has hardened steel truss bearings to effectively carry door loads.


Weight: 1.71 lbs.

No. 1-5869-X

Same as 5869-X except has removable hinge pin. Weight: 1.85 lbs.

No. 5870-X

Material 10 ga. (.134") high-strength, low alloy.

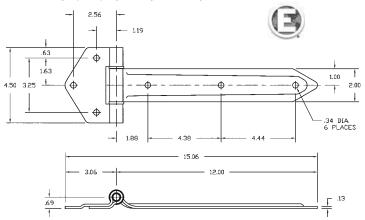



No. 5870-X


Same as 5869-X except measures 12". Weight: 1.98 lbs.

No. 1-5870-X

Same as 5870-X except has removable hinge pin. Weight: 2.11 lbs.

No. 14-5870-X

Same as 5870-X except with (6) .40" dia. mounting holes.

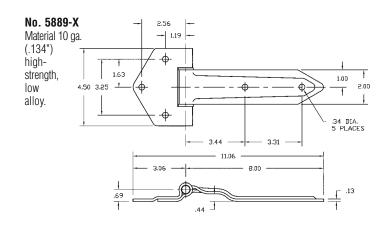



No. 5889-X

8" over-the-seal stamped steel hinge for flush mounting. Hardened steel truss bearings and offset.

Weight: 1.65 lbs.

HINGES

No. 1-5889-XR&L


8" over-the-seal stamped steel hinge furnished with 2-5/8" wide narrow hinge butt, nylon bushings and steel hinge pin. Specify right or left hand when ordering. Weight: 1.16 lbs.

No. AL1-5889

Aluminum 8" hinge available on request quote. Same as 1-5889-X except has stainless steel hinge pin and is furnished in 7-ga. (.179") thick material. Weight: .53 lbs.

No. 1-5889-XL

Material 10 ga. (.134") high-strength, low alloy.





No. 5890-X

Same as No. 5889-X except measures 12". Weight: 2.00 lbs.

No. 1-5890-X


Same as No. 5890-X except has removable hinge pin. Weight: 2.00 lbs.

No. 14-5890-X

Same as 5890-X except with (6) .40" dia. mounting holes.

No. 5890-X

Material 10-ga. (.134") high-strength, low alloy.

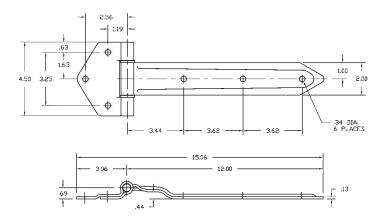



No. 14-5880-XR&L

Malleable iron, radius butt hinge. Stamped mounting type hinge assembly.

No. 14-5880-XL

