



MULTI-POINT LOCKS – 2 & 3 POINT

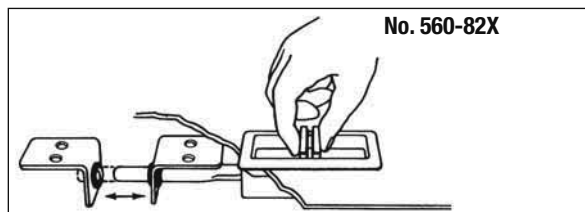

Package	560-82X		1-560-82X	
Includes:		Qty.		Qty.
Center Cases	2-560-P8	(4)	2-560-P8	(4)
Rod Guides S/A	1-560-51	(16)	1-560-51	(8)
5/16" Dia. AL Rods	AL1-560-5	(8)	AL1-560-5	(8)
Slam-Action Strike	—		561	(8)

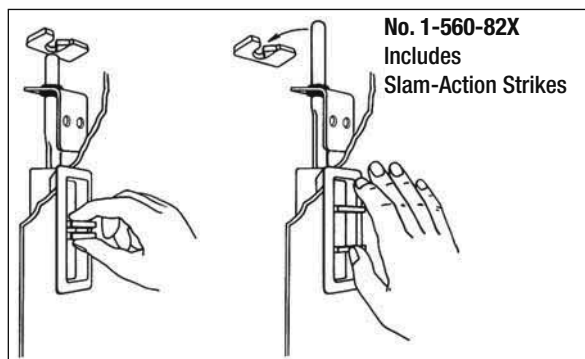

No. 560-82X

This unique, light-duty 2-point squeeze dead bolt latch is intended for use on lightweight compartment or cabinet doors. It incorporates a zinc center case, 5/16" aluminum rods, and stamped steel guide brackets and strike points.

The latch is readily activated with a simple two-finger squeeze. This retracts the end bolts from the strikes (whether the ones shown, or a slam-type strike, such as that illustrated).



The center case is easily attached by means of a steel mounting bracket using two self-tapping screws.

Weight: 3.25 lbs.

Can be used with adjoining key-locking cylinder No. 560-61P5.

SLAM


WITHDRAW



No. 561 Slam-Action Strike

This strike allows any latching mechanism using 5/16" diameter rods which normally operate as dead bolts to function as a slam/dead bolt.

Swinghandle – PROGRAM 1107

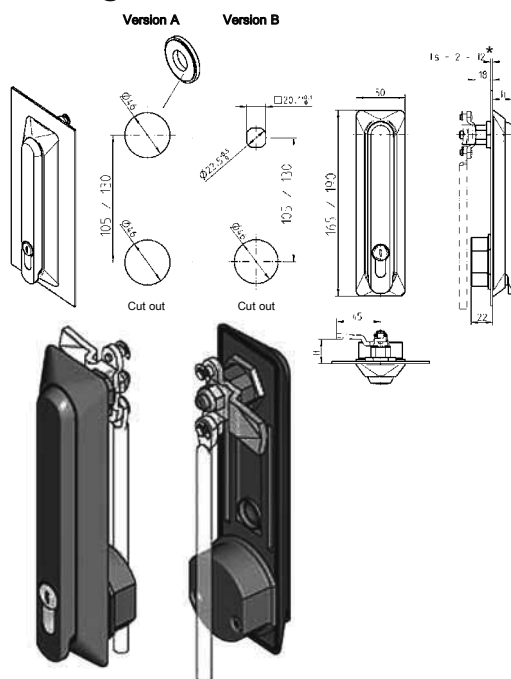

Attention:

With adapter the maximum door gauge (TS) will be 6 mm

Note:

If door gauge (Ts) > 4 mm standard round rods cannot be used!

Swinghandle polyamide GF black, shaft brass,
fixing material m.s. zinc pl., with seal

Swinghandle "long" (190) for profile half cylinder

40 (h = 20) 1107-U1-G

but with dust cap sealable

40 (h = 20) 1107-U2-G

40 (h = 20) (Handle zinc die black p.c.)

45 (h = 25) 1107-U102-G

45 (h = 25) 1107-U32-G

Swinghandle "short" (165), for profile half cylinder

40 (h = 20) 1107-U158-G

but with dust cap sealable

40 (h = 20) 1107-U159-G

45 (h = 25) 1107-U169-G

Adapter polyamide GF black required for cut out version A

1107-53

Seal for adapter 1107-61-02VB

* Order screw set separately if Ts > 4 mm 1107-U170