


ROTARY LATCHES AND STRIKERS

No. 16377

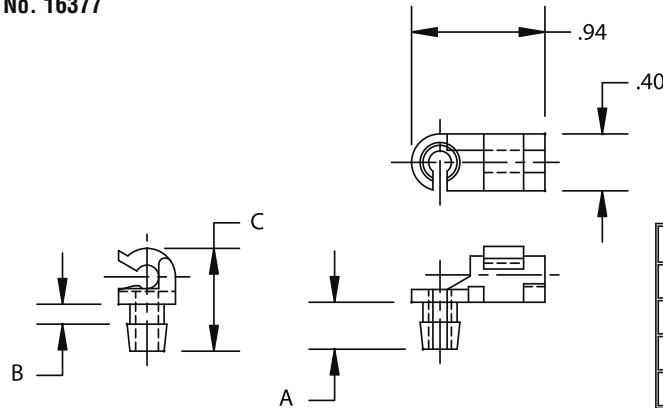

NOTES:


1. RECOMMENDED HOLE SIZE: $\frac{.240}{.250}$ DIA.
2. FOR USE WITH .156 DIA. ROD.
3. USABLE TEMP. RANGE: +250°F TO -40°F
(+121°C TO -40°C)

COLOR	PART NO.	HAND	A	B	C
WHITE	16377-1	RIGHT	.33	.14	.71
BLACK	16377-2	LEFT	.33	.14	.71
RED	16377-3	RIGHT	.28	.08	.66
GREEN	16377-4	LEFT	.28	.08	.66

Mini Rotary Accessories


No. 16592-R/No. 16592-SSR

Mounting bracket.
Zinc-plated or stainless steel.
Available in right or left hand.



No. 1-16592-SSR

With mounting slots.
Type 300 series stainless steel.
Available in right or left hand.



No. 16619-15PK

Panel thickness 13 gauge.

No. 1-16619-15PK


Panel thickness 11 gauge.

No. 1-16619-25PK


For 1/4" rods with .50" diameter.

No. 1-16619-31PK

For 5/16" rods with .50" diameter.




No. 1-16619-15PK
Rod adapter

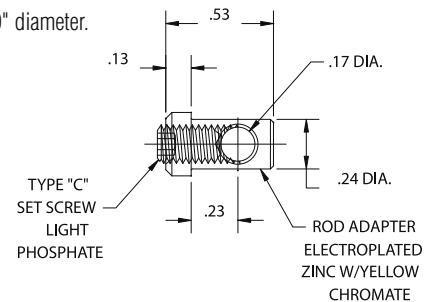

No. 1-16619-25PK

Rod adapter with set screw in base

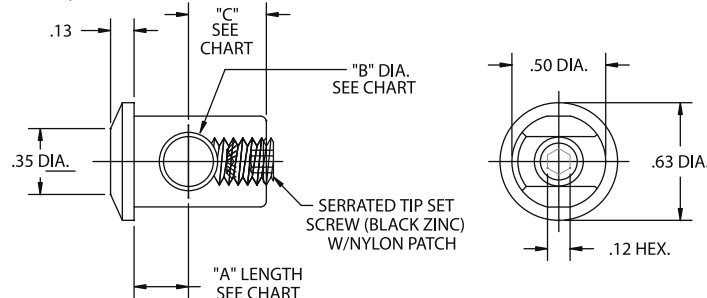


ASSEMBLY #	"A"	"B"	"C"	TORQUE
1-16619-25PK	.260/.265	.265	.450	30-45 IN/LBS.
1-16619-31PK	.320/.325	.328	.383	30-45 IN/LBS.

ADAPTER FINISH: (64) ELEC. ZINC W/YELLOW CHROMATE
SET SCREW FINISH: BLACK ZINC

No. 16619-25PK

Rod adapter with set screw in head.

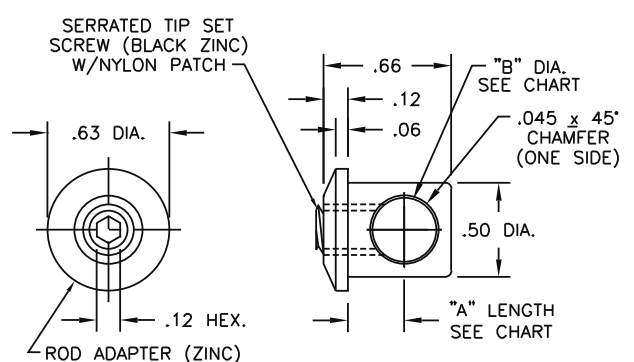

ASSEMBLY #	A	B	TORQUE
16619-25PK	.260/.265	.265	30-45 IN/LBS.
16619-31PK	.290/.295	.328	30-45 IN/LBS.

Industrial Hardware Distributors, Inc.

620 Spicer St., Akron, OH 44311 • 800.824.1864 | 3415 S.W. 6th St., Ocala, FL 34474 • 800.682.8900
www.industrialhwe.com


ROTARY LATCHES AND STRIKERS

No. 20-300-L


Adjustable mounting rotary with integral release handle.



No. 20-300-L

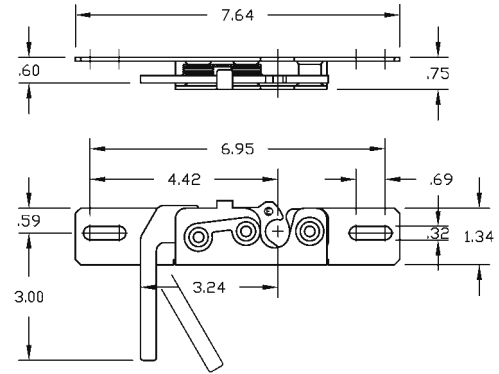

No. 2T-400-10

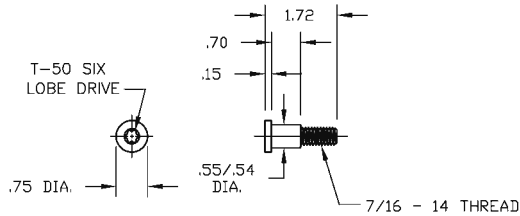


No. 2T-400-52


w/washer

No. 26-300-52


Mounting striker and plate subassembly.

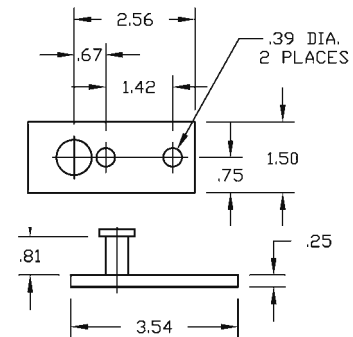

No. 5-400-52

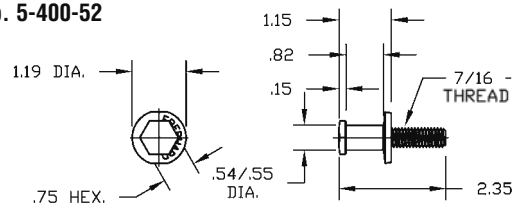

No. 16642-10

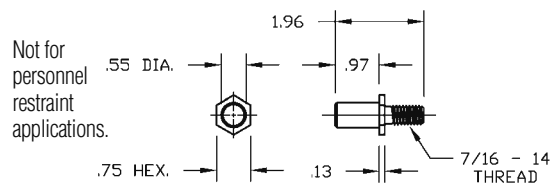


Not for
personnel
restraint
applications.

ROTARY LATCHES AND STRIKERS

No. 3-240-52U

Extended hex bolt striker and washer.

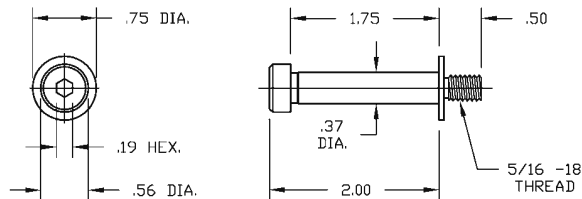


No. 3-240-10

less washer


No. 240-52U

Hex drive striker bolt and washer.

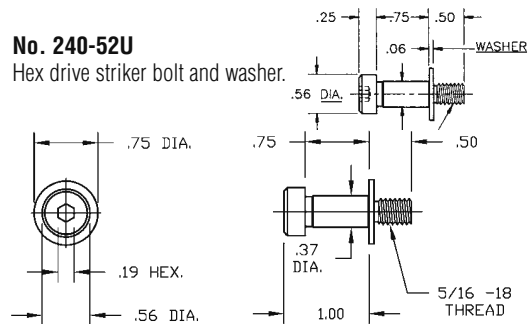


No. 1T-240-52U

Torx drive striker bolt and washer.

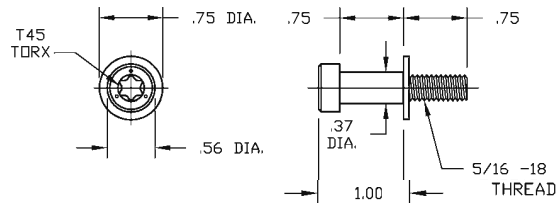


No. 1T-240-10

Torx drive striker bolt.

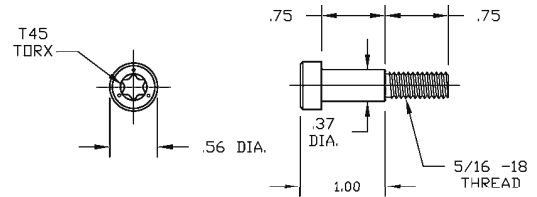

No. 4-240-52

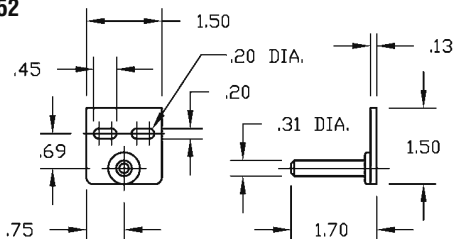

No. 4-240-52

Adjustable striker plate subassembly.




No. 15-240-52

Same as 4-240-52 except mounting holes are vertical.

No. 2T-400-52

Six Lobe Drive Striker/Washer subassembly weight: .09 lbs.

No. 2T-400-52

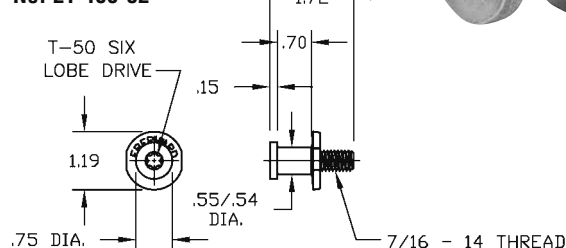

No. 16858

Carb clip

