

HINGES


Stiffening Rib

(Standard on 1/4" thick material)



Alternate Tapered Strap

Available with hole pattern #1 only.

Note: 5884 Series shown below with rib.

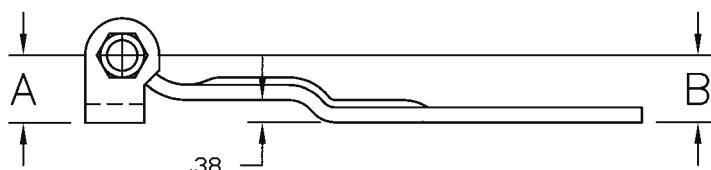

MOUNTING HOLES PATTERNS

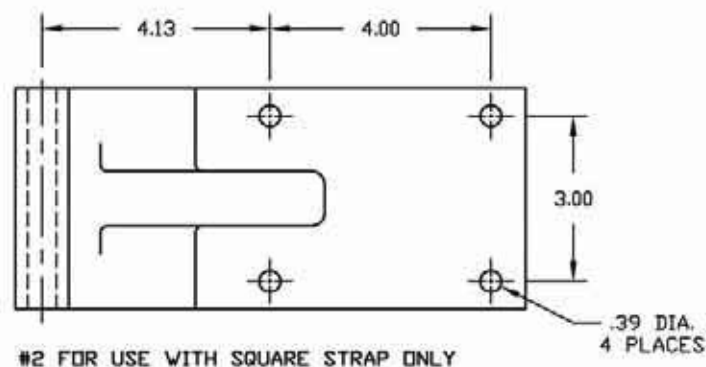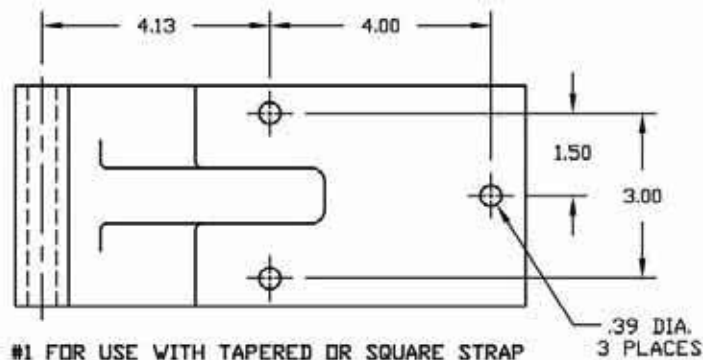

No. 5884 & 5885

A strong, solid hinge that provides long-lasting, smooth operation. Available with notched butt to provide greater hinge rotation, gasket clearance and use of a smaller post.

Finish:

Hot-dipped galvanized. Other options available. Consult factory.

No. A1-5884-GU Available with grease fitting.

Dimensions:

4"	width of strap
8-3/4"	center pin to end of strap
4-13/16"	butt length
1-1/4"	butt width

Weight:

4.2 lbs. (1/4" material)

4.9 lbs. (5/16" material)

When ordering, use the following part number guidelines for available options. Example Part No. (read vertically) A1-5885-U.

A = Basic offset of hinge strap assembly (B dim.)

A = 1-1/8" offset

B = 1-3/8" offset

1 = Hole patterns

1 = 3 hole pattern

2 = 4 hole pattern

5 = Strap length

5 = 8-3/4" center pin to end of strap standard

8 = Style of nose

8 = Square nose

9 = Tapered nose

8 = Hinge tubing I.D.

8 = .500 I.D. std. used with No. 2X-242-A carbon steel hex-head cap screw and No. 5897-4 nut or No. 5897-SS3 stainless steel hex-head cap screw. (2) No. 15852 case-hardened truss washers furnished as standard.

9 = .625 I.D. used with nylon bushings No. 5888-3 and stainless steel pin No. 18-5897-SS3 or brass bushing No. 16372 with hex-head cap screw.

5 = Material thickness

5 = 5/16" thick without rib

4 = 1/4" thick with rib


U = Unassembled assembly

SBU = Unassembled assembly with stainless steel bolt.

HINGES

No. 5869-X

Material 10 ga. (.134") high-strength, low alloy.

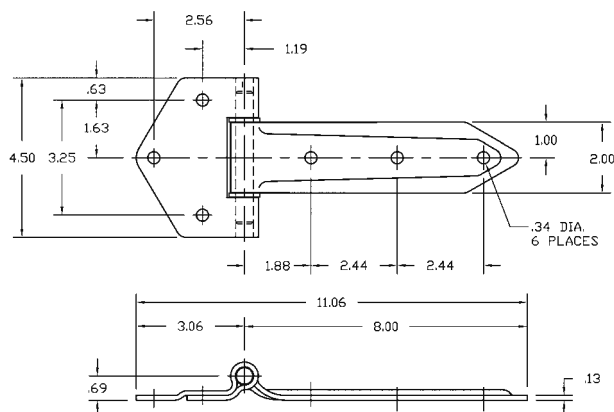

No. 5869-X

8" stamped steel hinge for flush mounting. Has hardened steel truss bearings to effectively carry door loads.

Weight: 1.71 lbs.


No. 1-5869-X

Same as 5869-X except has removable hinge pin.

Weight: 1.85 lbs.

No. 5870-X

Material 10 ga. (.134") high-strength, low alloy.

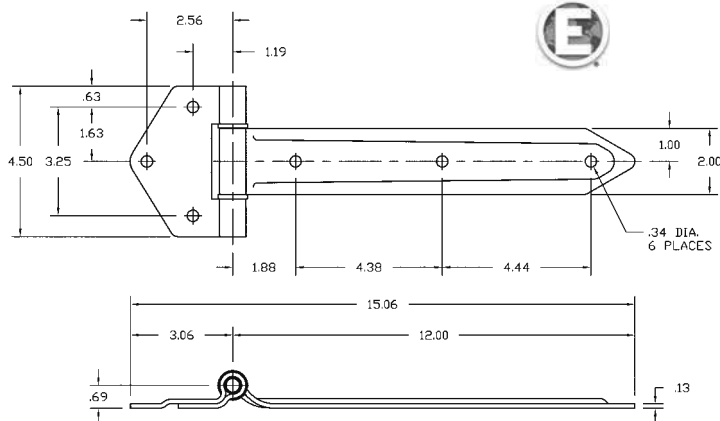

No. 5870-X

Same as 5869-X except measures 12".

Weight: 1.98 lbs.

No. 1-5870-X

Same as 5870-X except has removable hinge pin.


Weight: 2.11 lbs.

No. 14-5870-X

Same as 5870-X except with (6) .40" dia. mounting holes.

No. 5889-X

Material 10 ga. (.134") high-strength, low alloy.

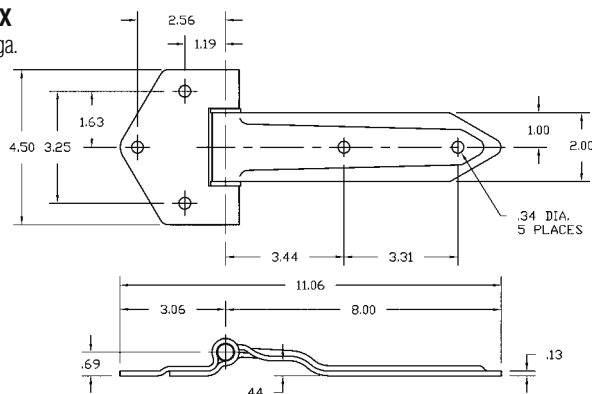


No. 5889-X

8" over-the-seal stamped steel hinge for flush mounting. Hardened steel truss bearings and offset.

Weight: 1.65 lbs.

HINGES

No. 26-6541-SSP

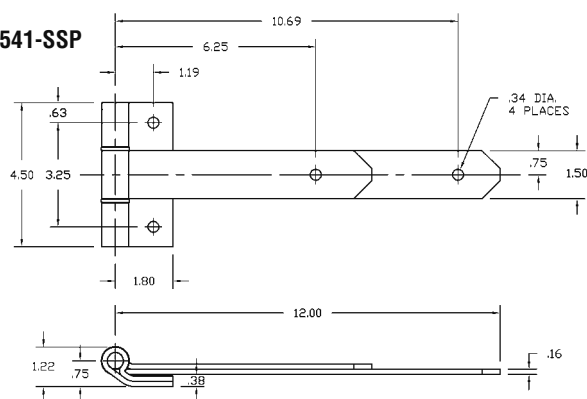


No. 26-6541-SSP

12" Hinge features a reverse butt which allows for 270° rotation. 304 stainless steel, burnished finish. Hinge strap has 3/8" offset. Weight: 2.5 lbs.



Features extra mounting hole in hinge butt. Extended mounting hole pattern in hinge strap to allow for wider extrusions around door frame. 304 stainless steel, burnished finish. 12" long. Weight: 3.0 lbs.

No. 8-6542-SSP

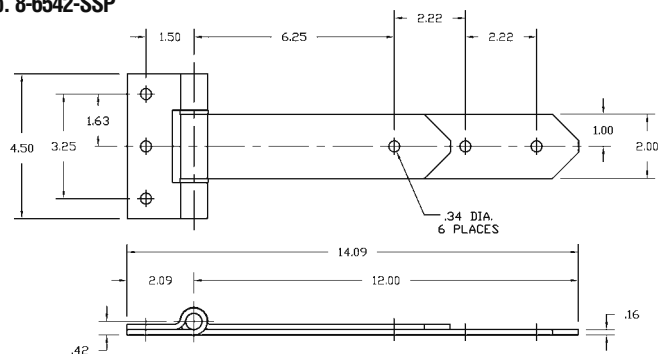


No. 8-6542-SSP




Prefix	Offset Dim.	X Dim.
1	1/8"	1.34"
2	1/4"	1.28"
3	5/16"	1.24"
4	3/8"	1.19"

No. 5867-L

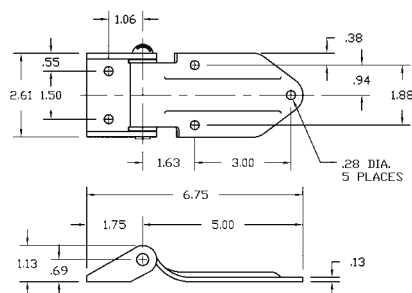


No. 5867-R&L

5" stamped steel hinge for flush mounting. Has nylon sleeve bearings for easier operation. Weight: 1.1 lbs.

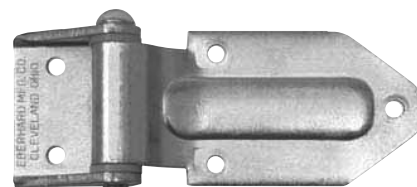

No. 5868-L

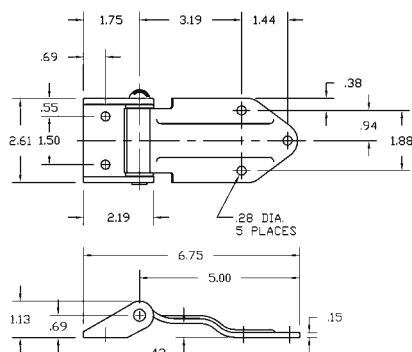

No. 5868-R&L

Same as No. 5867 except designed for over-the-seal flush mounting. Weight: 1.4 lbs.

