

HINGES

LAMINATED STEEL HINGE

All steel hinges have double or triple laminations in the strap for greater strength. Opens 180 degrees. Supplied with non-removable pin for maximum security. (Also available with removable pin). Available flush or 3/16" offset. Available in 10 ga. stainless steel.


Specifications:

Bracket — 8 Ga. x 5" x 3" from center of pin

Strap — 8 Ga. x 2-1/4" x 8", 12", 16" and 19" long.


Pin — 1/2" Dia. Steel

Finish — Zinc plated

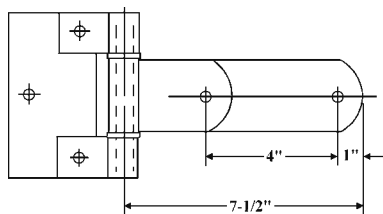


No. 308 / 308-SS

Wt. 3 lbs.

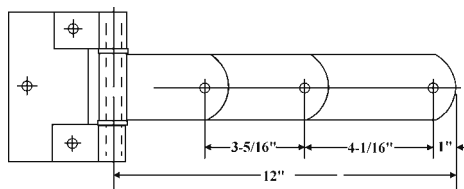


No. 312 / 312-SS

Wt. 4 lbs.

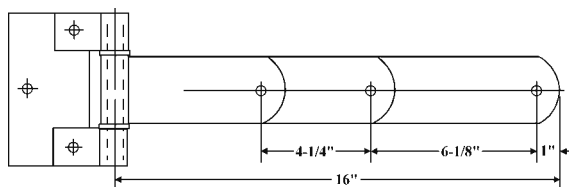

No. 316 / 316-SS

Wt. 5 lbs.

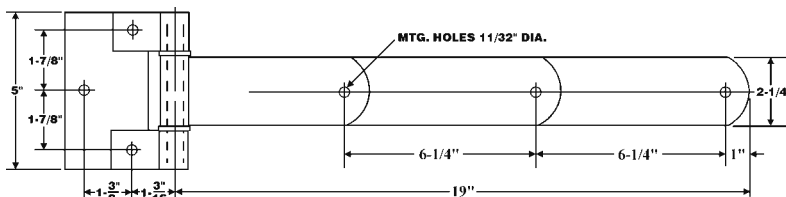

No. 319 / 319-SS

Wt. 6 lbs.



HINGES

EMBOSED STEEL HINGES

Manufactured from high quality steel. Embossed for greater strength. For use on trailers and truck bodies. Has wide bracket with three mounting holes. Three strap lengths available. Hinges supplied with non-removable pin for maximum security. Also available with removable pins. To order removable pins add the letter R to the catalog number. Example: 2008-R.

Specifications:


Bracket — 8 Ga. x 4-1/2" x 3" from center of pin
Strap — 8 Ga. x 2" x 8", 12" or 16" as shown below
Pin — 1/2" Dia. steel
1/8" Shim available — See below No. 2000 Shim

ALSO AVAILABLE IN .160 ALUMINUM & 10 GA. PLAIN OR POLISHED STAINLESS STEEL




No. 2008 / 2008-SS

Flush — Strap 8" long
Mounting holes for 5/16" bolts
Finish — Steel - Zinc plated
 Stainless - Plain or polished
Weight — 2 lbs.

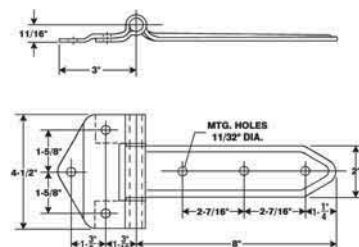

No. 2012 / 2012-SS

Flush — Strap 12" long
Mounting holes for 5/16" bolts
Finish — Steel - Zinc plated
 Stainless - Plain or polished
Weight — 2-1/4 lbs.

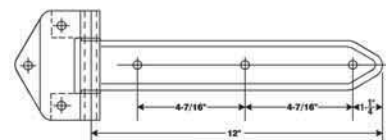

No. 2016 / 2016-SS

Flush — Strap 16" long
Mounting holes for 5/16" bolts
Finish — Steel - Zinc plated
 Stainless - Plain or polished
Weight — 2-1/2 lbs.



SHIM

No. 2000

For use with 2000 series hinges with wide bracket when 1/8" offset is required.

Finish — Zinc Plated



HINGES

NARROW BRACKET SIDE & REAR DOOR HINGES

Manufactured from high quality steel. Strap is embossed for greater strength. Same basic hinge as Polar 2000 Series but features a narrow bracket for mounting where space is limited.

Specifications:

Bracket — 8 Ga. x 4-1/2" x 1-5/8" from center of pin

Strap — 8 Ga. x 2" x 8", 12" or 16" as shown below.

Pin — 1/2" Dia. steel




Finish — Steel - Zinc plated

Stainless - Plain or polished

ALSO AVAILABLE IN .160
ALUMINUM & 10 GA.
PLAIN AND POLISHED
STAINLESS STEEL



DIMENSIONAL DRAWINGS

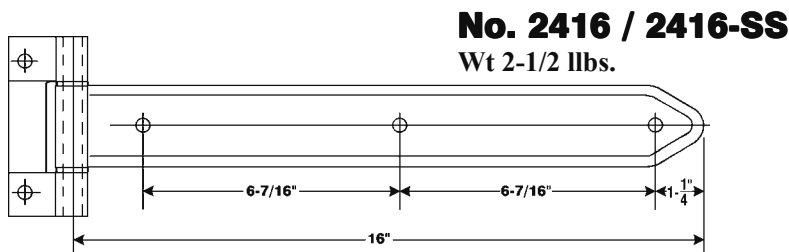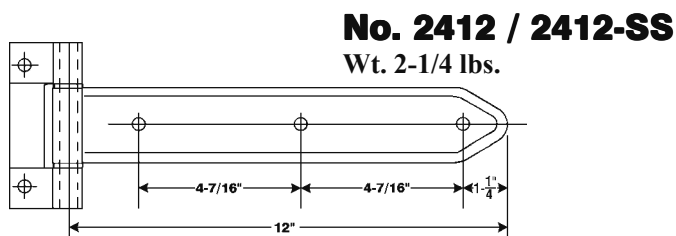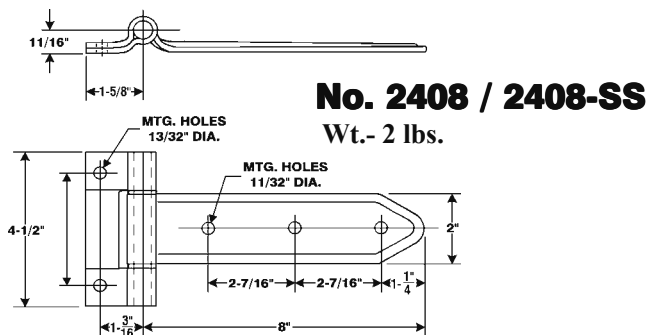

HINGES

EMBOSSED OVER THE SEAL HINGES

Designed to bridge door molding or door seal. Manufactured from high quality steel. Embossed for greater strength. Three strap lengths available. All hinges supplied with non-removable pin for maximum security. Also available with removable pins. To order removable pins add the letter R to the catalog number
Example: 2108-R.

Specifications:

Bracket — 8 Ga. x 4-1/2" x 3" from center of pin

Strap — 8 Ga. x 2" x 8", 12" or 16" as shown below

Pin — 1/2 Dia. steel

1/8" Shim available

All mounting holes for 5/16" bolts.



ALSO AVAILABLE IN .160 ALUMINUM & 10 GA. PLAIN AND POLISHED STAINLESS STEEL

No. 2108 / 2108-SS






Flush — Strap 8" long

Weight — 2 lbs.

Finish — Steel - Zinc plated

Stainless - Plain or polished

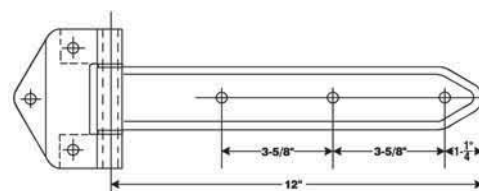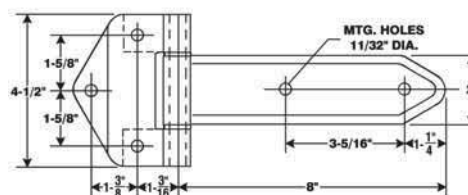


No. 2112 / 2112-SS

Flush — Strap 12" long

Weight — 2-1/4 lbs.

Finish — Steel - Zinc plated

Stainless - Plain or polished

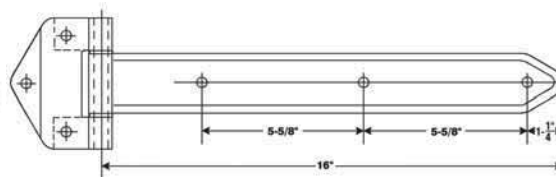

No. 2116 / 2116-SS

Flush — Strap 16" long

Weight — 2-1/2 lbs.

Finish — Steel - Zinc plated

Stainless - Plain or polished

Industrial Hardware Distributors, Inc.

620 Spicer St., Akron, OH 44311 • 800.824.1864 | 3415 S.W. 6th St., Ocala, FL 34474 • 800.682.8900
www.industrialhwe.com